

FRIALIT[®]-DEGUSSIT[®] Oxide Ceramics


Accelerator Unit

Application:

High-voltage accelerators

Material:

Aluminium Oxide **FRIALIT F99.7**
Rings made of OF-Cu

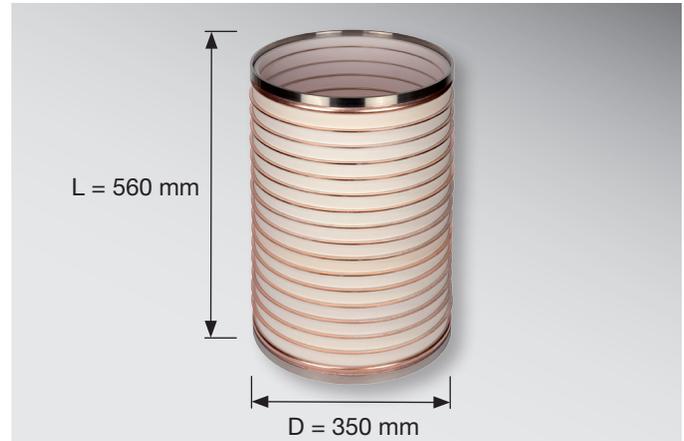

FRIATEC works photo

Particle accelerators are used throughout the world in research and development as well as in the medical field. They make it possible to view the minutest particles in existence, facilitate new scientific discoveries and open the door to new therapeutic approaches in the treatment of cancer.

Renowned institutions include the European Organisation for Nuclear Research (CERN) in Switzerland with the Large Hadron Collider (LHC), the German Electron Synchrotron (DESY), the Heidelberg Ion-Beam Therapy Center (HIT) and many more. Such institutions strongly prefer the use of ceramic-to-metal components made of **FRIALIT-DEGUSSIT** High-Performance Ceramics.

Due to their excellent properties, these components are used for high-voltage insulation or for beam deflection through fast-pulsed magnets. FRIATEC manufactures such ceramic-to-metal components in customised dimensions. The components, made of **FRIALIT F99.7** and metal, display only minimal leakage and out-gassing rates, and are thus ideal for use in ultra-high vacuum (UHV) conditions. Corresponding metal parts provide for easy connection to further components.

In the radiation source insulated by our ceramics, atoms are ionised and pre-accelerated by means of high voltage. After this, the particles enter the synchrotron orbits, are channelled by means of magnetic fields to circular paths and, step-by-step, further accelerated in these orbits.

The particles are further focused and deflected by means of vacuum chambers made of **FRIALIT-DEGUSSIT** Oxide Ceramics. The vacuum chamber made of **FRIALIT F99.7** here illustrated is used for beam deflection as a so-called kicker chamber. It is also responsible for keeping the particles on their path. Passed through two magnets, the particle beam can be horizontally or vertically deflected, and thus controlled with precision.

Soldering (hard-soldering process) of the copper electrodes to the rings made of **FRIALIT F99.7** results in an extremely resilient accelerator unit suitable for UHV applications. This enables reliable beam control with excellent high-voltage resistance.

- Minimum desorption and leakage rates
- Heatable up to bis 300°C
- Excellent insulation properties

Competence plus responsibility

Our clients rightly expect first class service with sustainable value.

FRIATEC Aktiengesellschaft
Ceramics Division
Steinzeugstraße 50
68229 Mannheim
Tel: +49 621 486-1879
info-frialit@friatec.de
www.friatec.com



an *OAliaxis* company